




3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

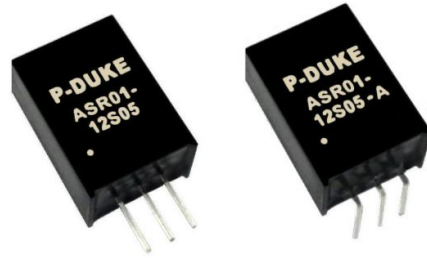

Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway



NON
-isolation

LOW
Standby
Power

OCP

OTP

SCP

PART NUMBER STRUCTURE

| ASR01 - | 12 | S | 05 | - | A |
|-------------|------------------------------------|-----------------|---|---|----------------------------------|
| Series Name | Input Voltage (VDC) | Output Quantity | Output Voltage (VDC) | | Assembly Options |
| | 12:-7~-32 -8~-32 -10.5~-32 | S:Single | 05: -5 5P2: -5.2 06: -6 08: -8 09: -9 12: -12 15: -15 | | □:Standard A: Horizontal type |
| | 24:-11.5~-32 -15~-32 -18~-32 | | | | |

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

| Model Number | Input Range VDC | Output Voltage VDC | Output Current | | Input Current @ No Load mA | Efficiency | | Maximum Capacitor Load μF |
|--------------|--------------------|-----------------------|----------------|----------------|----------------------------------|--------------|--------------|------------------------------|
| | | | @Min.Load A | @FullLoad A | | Min.Vin % | Max.Vin % | |
| ASR01-12S05 | -7 ~ -32 | -5 | -0.1 | -1 | -3 | 91.5 | 84.5 | 1600 |
| ASR01-12S5P2 | -7 ~ -32 | -5.2 | -0.1 | -1 | -3 | 92.0 | 85.0 | 1600 |
| ASR01-12S06 | -8 ~ -32 | -6 | -0.1 | -1 | -3 | 92.5 | 86.5 | 1000 |
| ASR01-12S08 | -10.5 ~ -32 | -8 | -0.1 | -1 | -3 | 94.0 | 89.0 | 1000 |
| ASR01-24S09 | -11.5 ~ -32 | -9 | -0.1 | -1 | -3 | 94.5 | 90.5 | 1000 |
| ASR01-24S12 | -15 ~ -32 | -12 | -0.1 | -1 | -3 | 96.0 | 92.0 | 470 |
| ASR01-24S15 | -18 ~ -32 | -15 | -0.1 | -1 | -3 | 96.0 | 93.5 | 470 |

INPUT SPECIFICATIONS

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|---|-------|------|------|----------------|
| Operating input voltage range | ASR01-12S05 | -7 | -12 | -32 | VDC |
| | ASR01-12S5P2 | -7 | -12 | -32 | |
| | ASR01-12S06 | -8 | -12 | -32 | |
| | ASR01-12S08 | -10.5 | -12 | -32 | |
| | ASR01-24S09 | -11.5 | -24 | -32 | |
| | ASR01-24S12 | -15 | -24 | -32 | |
| | ASR01-24S15 | -18 | -24 | -32 | |
| Start up time | Constant resistive load Power up | | 15 | | ms |
| Rise time | Time for Vo to rise from 10% to 90% of Vo | | 10 | | ms |
| Maximum input current | Vin=Vin(min); Io=Io(max) | | | -1 | A |
| Input filter | | | | | Capacitor type |

OUTPUT SPECIFICATIONS

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------|---|----------|------|--------|---------------------------------|
| Voltage accuracy | | -2.0 | | +2.0 | % |
| Line regulation | Low Line to High Line at Full Load | -1.0 | | +1.0 | % |
| Load regulation | 10% Full Load to Full Load Standard type Suffix-A | -0.5 | | +0.5 | % |
| | | -0.6 | | +0.6 | |
| Ripple and noise | Measured by 20MHz bandwidth | | 50 | | mVp-p |
| | | -5.2Vout | 50 | | |
| | | -6Vout | 75 | | |
| | | -8Vout | 75 | | |
| | | -9Vout | 75 | | |
| | | -12Vout | 75 | | |
| | | -15Vout | 75 | | |
| Temperature coefficient | | -0.015 | | +0.015 | %/°C |
| Dynamic load response | 50% load step change Peak deviation Recovery time | | 5 | 7 | %Vo |
| | | | 250 | 350 | μs |
| Over load protection | % of Iout rated; Hiccup mode | | -2.0 | | A |
| Short circuit protection | | | | | Continuous, automatics recovery |

GENERAL SPECIFICATIONS


| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------|--------------------------|------|------|------|------------------------------|
| Switching frequency | 12S05, 12S5P2 | 323 | 380 | 437 | kHz |
| | Others | 425 | 500 | 575 | |
| Safety meets | | | | | IEC/ EN/ UL62368-1 |
| Case material | | | | | Non-conductive black plastic |
| Potting material | | | | | Silicone (UL94 V-0) |
| Weight | | | | | 3.1g(0.11oz) |
| MTBF | MIL-HDBK-217F, Full load | | | | 8.475 x 10 ⁶ hrs |

ENVIRONMENTAL SPECIFICATIONS


| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|-----------------------------|----------------------|------|------|------|--------------|
| Operating temperature range | | -40 | | +85 | °C |
| Over temperature protection | Internal IC junction | | 165 | | °C |
| Storage temperature range | | -55 | | +125 | °C |
| Thermal shock | | | | | MIL-STD-810F |
| Vibration | | | | | MIL-STD-810F |
| Relative humidity | | | | | 5% to 95% RH |

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

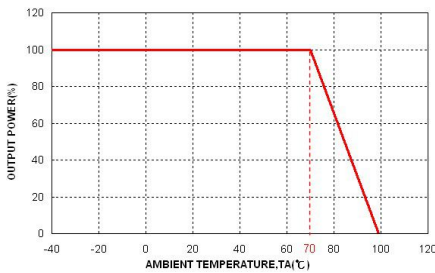

ASR01-12S05 Derating Curve

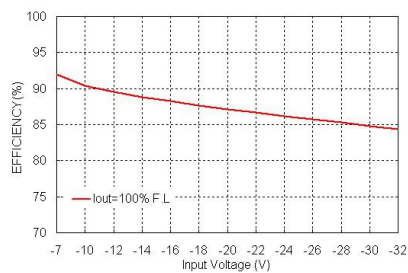

ASR01-12S05 Efficiency VS Input Voltage

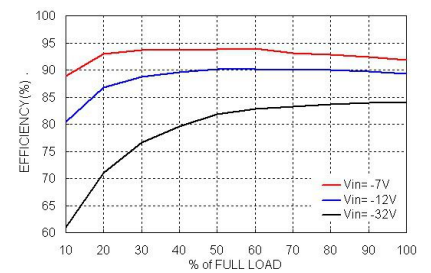

ASR01-12S05 Efficiency VS Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

| Model | Fuse Rating (A) | Fuse Type |
|-------------|-----------------|-----------|
| ASR01-12□□□ | 1.6 | Slow-Blow |
| ASR01-24□□□ | 1.6 | Slow-Blow |

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

STARDANDS ASR01-□□S□□
Vertical SIP type

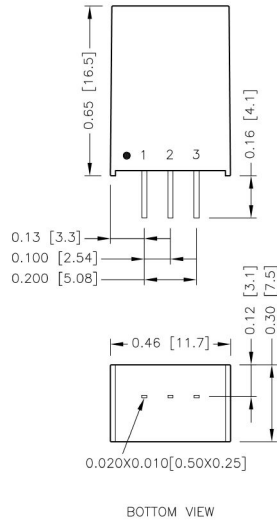


PIN CONNECTION

| PIN | DEFINE |
|-----|--------|
| 1 | GND |
| 2 | -Vin |
| 3 | -Vout |

- All dimensions in Inch [mm]
Tolerance: X.XX±0.02 [X.X±0.5]
X.XXX±0.01 [X.XX±0.25]
- Pin dimension tolerance ±0.004 [0.10]


SUFFIX-A ASR01-□□S□□-A
Horizontal SIP type

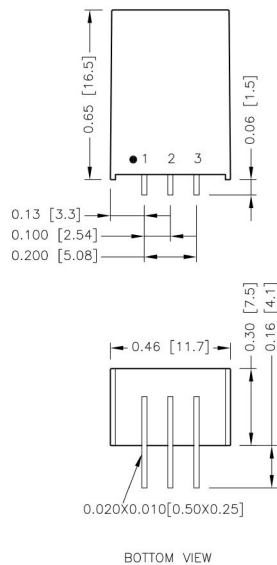

RECOMMENDED PAD LAYOUT


STARDANDS

ASR01-□□S□□ Vertical SIP type



SUFFIX-A

ASR01-□□S□□-A Horizontal SIP type



All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3: $\Phi 0.031[0.80]$
 Top view pad 1.2.3: $\Phi 0.039[1.00]$
 Bottom view pad 1.2.3: $\Phi 0.063[1.60]$

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding Environment.

Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed 100°C.

When Operating, adequate cooling must be provided to maintain the test point temperature at or below 100°C.

Although the maximum point Temperature of the power modules is 85°C, you can limit this Temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

