


ZX10-EX FULLY RUGGED TABLET



- Certification ATEX et CEIEx Zone 2/22 pour un usage en zones explosives
- Processeur 8 cœurs Qualcomm® QCS6490
- Écran tactile capacitif LumiBond de 10.1" compatible avec la technologie de lecture en plein soleil Getac (1 000 nits)
- Certification MIL-STD-810H et IP66, avec résistance aux chutes de 1,8 m (6 pi)
- Plusieurs configurations avec des outils de gestion de niveau entreprise dans un facteur de forme léger

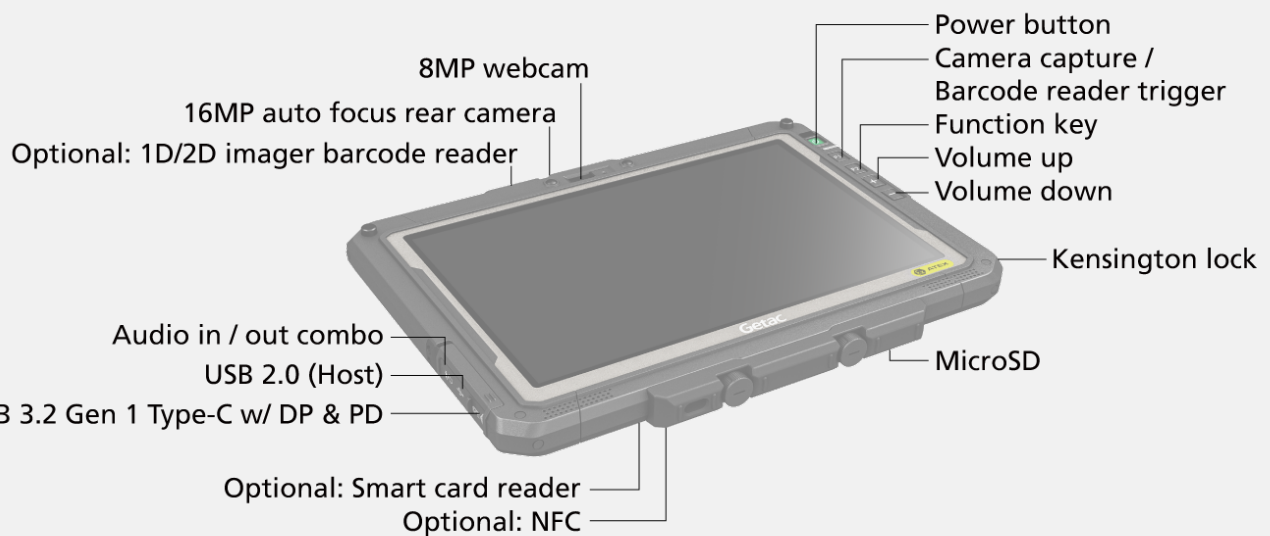

SPECIFICATIONS

Generation

G2

Operating System

Android™ 15.0

Mobile Computing Platform

Qualcomm® QCS6490, Octa-core 1.9GHz

Max. 2.7GHz

Graphics

Qualcomm® Adreno™ 643 GPU

NPU

Qualcomm® Hexagon™ Processor,
up to 13 TOPS with 6th Qualcomm AI Engine

Display

10.1" TFT LCD WUXGA (1920 x 1200)

Anti-static protection film

1000 nits LumiBond display with Getac sunlight
readable technology

Storage & Memory

8GB LPDDR5

128GB UFS

Optional: 256GB UFS

Device Button

Power button

4 tablet programmable buttons

Pointing Device

Touchscreen

- Dual mode touchscreen (multi-touch and digitizer)

Audio

Integrated stereo speakers

Integrated dual-array microphone

Expansion Slot

Optional: Smart card reader

Optional: 1D/2D imager barcode reader

Optional: NFCⁱ

I/O Interface

8MP webcam x 1

16MP auto focus rear camera x 1

Audio in/out combo x 1

USB 2.0 (Host) x 1

USB 3.2 Gen 1 Type-C w/ DP & PD x 1

MicroSD x 1

Optional: SIM card slot x 1 (Nano-SIM, 4FF)

Communication Interface

Wi-Fi 6E 802.11axⁱⁱ

Bluetooth (v5.2)ⁱⁱ

Optional: Dedicated L1/L5 GPS^{iv}

Optional: 4G LTE mobile broadbandⁱⁱⁱ

Optional: 5G Sub-6ⁱⁱⁱ

Optional: Dual SIM (Nano-SIM 4FF and e-SIM)ⁱⁱⁱ

Security Feature

Kensington lock

Optional: Smart card reader

Optional: NFCⁱ

Power

Li-ion battery (3.88V, typical 4990mAh; min. 4870mAh)

+ Battery bay cover

Dimension (W x D x H) & Weight

275 x 204 x 20.05mm (10.83" x 8.03" x 0.79")

1.05kg (2.31lbs)^v

Rugged Feature

MIL-STD-810H certified

IP66 certified

Vibration & 6 feet (1.8m) drop resistant^{vi}

ATEX & IECEx certified

Environmental Specification

Temperature^{vii}:

- Operating: -21°C to 55°C / -5.8°F to 131°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Explosion Protection

ATEX/IECEx Zone 2/22

Ex II 3G Ex ic op is IIC T4 Gc

Ex II 3D Ex ic op is IIIC T130°C Dc

Pre-installed Software

Getac Camera

Getac Input Method

Getac Driving Safety Utility (trial version)

Getac settings and Google applications (Search, Chrome,

Gmail, Maps, YouTube, Play, Drive, YouTube music,

Google TV, Meet and photos)

Getac Log Tool

Getac Diagnostic

Getac Monitoring (trial version) agent/SDK

Getac Management (trial version) agent/SDK

Optional software

Getac Driving Safety Utility

Getac Monitoring

Getac Management

Getac OEMConfig

Accessories

Battery (3.88V, typical 4990mAh; min. 4870mAh)

Optional:

Carry bag

Battery (3.88V, typical 4990mAh; min. 4870mAh)

High capacity battery

(3.88V, typical 9980mAh; min. 9740mAh)

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

65W USB-C AC adapter

Digitizer pen with tether

Anti-static protection film

Hard handle^{viii}

Shoulder strap (2-point)

Shoulder harness (4-point; handsfree)

Rotating hand strap with kickstand

100W Type-C AC adapter

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

ZX10-EX FULLY RUGGED TABLET

- I. 13.56MHz contactless NFC (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- IV. Support GPS, GLONASS, Galileo and BeiDou. Only available in the US, UK, EU, Australia and New Zealand.
- V. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 140g.
- VI. Drop test results vary from configurations and optional accessories.
- VII. When using AC power, the device operates in temperatures as low as -29°C (-20°F), as tested by an independent third-party laboratory following MIL-STD-810H standards. For battery-only operation, it functions down to -15°C (5°F) with one standard battery, -21°C (-6°F) with two standard batteries, and -29°C (-20°F) with two high-capacity batteries.
- VIII. Factory option. Not user swappable.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Getac

GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2026 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.